

# Celestron C11 Edge HD Notes



## Contents

Mount Issues.....	2
Finder Notes .....	3
Mirror Flop Issue – Due to Finder Knob Position.....	3
EAF Limits Setup.....	3
ZWO EAF Settings for Various Targets.....	3
C11 Edge HD Back Focus .....	4
Cloudy Nights Discussion – Important Notes.....	4
Baader Flip Mirror Specs.....	5
ZWO ASI533 Camera Specs.....	5
Visual Train Mechanical Setup for Baader Flip Mirror .....	6
Visual Train Mechanical Setup for Tele Vue Power Mate 2.5x.....	8
Barlows.....	9
Suggested Barlow Workflow .....	9
Barlow Notes.....	9
Barlow Example of Jupiter .....	10


## Mount Issues

Because of the large 11" tube size on the C11, this presents a special problem using it with the AM5 mount. As can be seen below the AM5 mount is spec'd to hold 44lbs of load with 11lbs of counterweight – however that 44lbs "must" have a center of gravity no more than 20cm from the center of the AM5.

The C11 center of gravity is approximately 10.5" (5" center of AM5 to bottom of tube + 5.5" half of tube diameter) or 26.67cm – 6.67cm over spec. So even though my loaded (optical train, cables, ASIAir, etc.) C11 weighs only about 36lbs (well below the 44lb limit) the mount failed to operate properly in some positions using only 7.5lbs of counterweight.

I had borrowed the 7.5lb weight from my CG4 mount and had to add the extra 4.1lb CG4 weight to get the AM5 to move properly in all positions. This 11.6lbs is slightly over the AM5 recommended 11.0 counterweight, but I am not seeing any problems so far.

The counterweight should be secured on a counterweight bar of no more than 25cm in length.

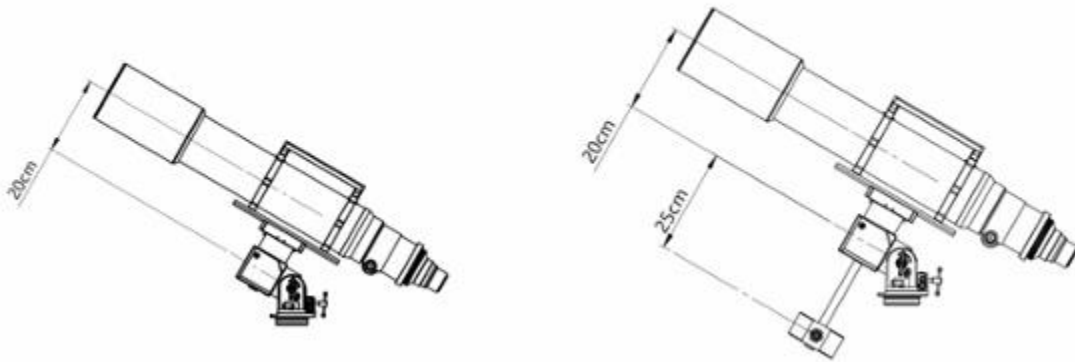

As a side issue, I wasted lots of time trying to use the 10lb counterbalance weights and bar from my AstroMaster mount which was too short, thin, and light. This does not work, even though it will screw into the AM5. Don't mess around – buy the recommended AM5 bar.

I'm glad I got the C11, and not the C14, now as I suspect that the C14 would not work using the AM5 mount due to its increased weight and higher center of gravity.

## Focuser Notes

### Mirror Flop Issue – Due to Focuser Knob Position

Prefer to have the focuser knob ABOVE the mirror so that it is pushing/pulling the TOP of the mirror. This allows gravity to automatically move the bottom of the mirror to hang in the correct place.

If the focuser knob is below the mirror, it will push/pull the bottom of the mirror and the top of the mirror 'may' (not always) 'flop' around causing the mirror to be tilted, and not perpendicular to the light path. This tilt will cause the image on the sensor to be offset and, with a small sensor camera, make the camera image appear to be all black.

If you are looking through the eye piece, you might not even notice the 'flop'. This is because you are seeing the entire light path, and not just a small piece like the camera sensor.

### EAF Limits Setup

The C11 focuser knob moves through approximately 36.9 complete turns.

I setup the EAF 'zero' position to be one focuser knob turn away from 100% clockwise (closest focus.)

I setup the EAF 'limit' position to be approximately two focuser knob turns away from 100% counter-clockwise (farthest focus.) It was actually set at 34 complete turns above the 'zero' position – or  $34 * 5,760 = 195,840$  (5,760 = #of EAF steps for one full rotation.)

### ZWO EAF Settings for Various Targets

- [Flip Mirror Optical Train](#) – 25mm Reticulated & ZWO ASI533MC Pro.
  - 98,570 – **Stars** ??? guess – not experimentally measured yet???
  - 97,765 – Jupiter (at perigee – closest to earth)
  - 97,000 - **Radio Towers Behind my House**
- [Tele Vue Power Mate Optical Train](#) – Tele Vue Power Mate 2.5x & ZWO ASI533MC Pro
  - 97,523 – **Stars**
  - 80,973 – **Jupiter** (at perigee)

Flip Mirror eye piece 'star' focus was 102,934 (+9,284) **before** I fixed the back focus from ~160mm to 146mm (factory spec) – see [Cloudy Nights discussion](#).

## C11 Edge HD Back Focus

### Cloudy Nights Discussion – Important Notes

From: [How Critical is the C11 Edge HD Backfocus - Cats & Casses - Cloudy Nights](#)

The C11 Edge is corrected for a back working distance of **146.05 mm (5.750") measured from the rear-most surface of the what is called the baffle nut.** If you unscrew everything from the back of your telescope, the baffle nut is the part that has a male 3.290"-16 "SCT" thread.

Nitpick (that's my job): Isn't an SCT thread 2", not 3.29"? My EdgeHD 8" has a 2" "SCT" thread on the rear baffle nut. My EdgeHD 11" has a 3.25" thread on the rear baffle nut and came with a 3.25" to 2" "SCT adaptor"

Ok...that's a good question. I have to admit that I'm not 100% certain of which part has the official "SCT" thread. Most of the references that I've seen point back to the thread on the baffle nut so maybe there's a "small" SCT thread for the C8 and C9.25 and a "large" SCT thread for the C11 and the C14. The thread size that I gave is for the C11/C14. Don't ask me how, but I've seen the actual Synta part drawing for the C14 Edge baffle nut and it shows a male 3.290"-16 UNC thread. The drawing is in Chinese so I couldn't read the date. The spec may be out of date, it may be a goof, or there may be some reasons for it. All of the other Celestron references to the "large" SCT thread on their site show a 3.25"-16 thread for the female side. 0.040" is not insignificant so I don't quite understand the difference. I'll try to find out and let you know. In the meantime, I agree that the "real" value should be 3.25"-16.

Precise Parts lists the baffle nut thread as 3.3"-16 and I just went and measured my 14" Edge and it is 3.285"-16. Therefore, I think that the part drawing is correct and the design spec shows a **3.290"-16 UNC thread** on the baffle nut.

The Celestron tolerance spec for the image plane is +/-0.5 mm. For most visual applications (i.e. just looking through the scope,) you can relax that spec to around +/- 10 mm. I've found that if you get the image plane to within about +/- 2 mm, it works pretty well--even for imaging.

If you get the image plane too far out of spec, you'll see a LOT of astigmatism. (Remember that astigmatism grows as the square of the field angle so check the edges of the image.) If you want the best performance, you need to actually measure the performance on your particular scope and adjust the distance to the minimum aberration distance and that's a bit involved. So, start off at 146 mm and see how it works. My guess is that you'll be happy with the result.

**My original back focus was closer to 160mm because I measured from the back of the 3" -> 2" SCT adapter on the back of the telescope.**

## Baader Flip Mirror Specs

### Technical Data

SKU #	2458055
Connections	S52, M48, T-2
Material	Aluminium, stainless steel
Mirror Material	Multilayer aluminium coating with dielectric protective layer
Optical Pathway	55 mm with S52 59 mm with M48/T-2
Weight	195 g
Dimensions (with all adapters)	63 x 77 x 69 mm



BFM II with DADOS-spectrograph and CCD-camera – no other flip mirror can carry such a heavy load (with such a lever) without bending, which would ruin the precise measurements.

© Baader Planetarium GmbH



3

## Using the FlipMirror II

The FlipMirror II allows a variety of permanent adaptations to your telescope ①. Use the rotary knob ② to switch between the rear port ③ and the top port ④; you can use an optional toothed belt to operate it with a motor (not included). An autoguider or a calibration lamp can be connected to the bottom port ⑤.



### General Function of the FlipMirror II

The BFM II lets you switch between a straight light path (**Position A**) for a camera or other measuring instruments and an angled light path (**Position B**), e.g. for an eyepiece. The following figure shows how it works. In addition, a calibration lamp for spectrographs or an Off-Axis-Guider pickoff-prism (that is not affected by the mirror position) can be connected at the **AUX-port** on the bottom.



## ZWO ASI533 Camera Specs

Back focus distance (without T2 Extender Ring): 6.5mm


Back focus distance (with T2 Extender Ring): 17.5mm

### Visual Train Mechanical Setup for Baader Flip Mirror

The upper section of the following diagram illustrates the mechanical spacing required to use the Baader Flip Mirror with the C11 telescope giving the most room BEHIND the flip mirror to place a Barlow lens. The lower section shows the minimum spacing needed for the Tele Vue Power Mate 2.5 Barlow.

This setup has a measured focal difference between using the eye piece and camera of about -2,820.

**Stars** = 93,650 w/Eye Piece, 90,830 w/Camera | **Radio Towers** 92,080 w/Eye Piece, 89,260 w/Camera

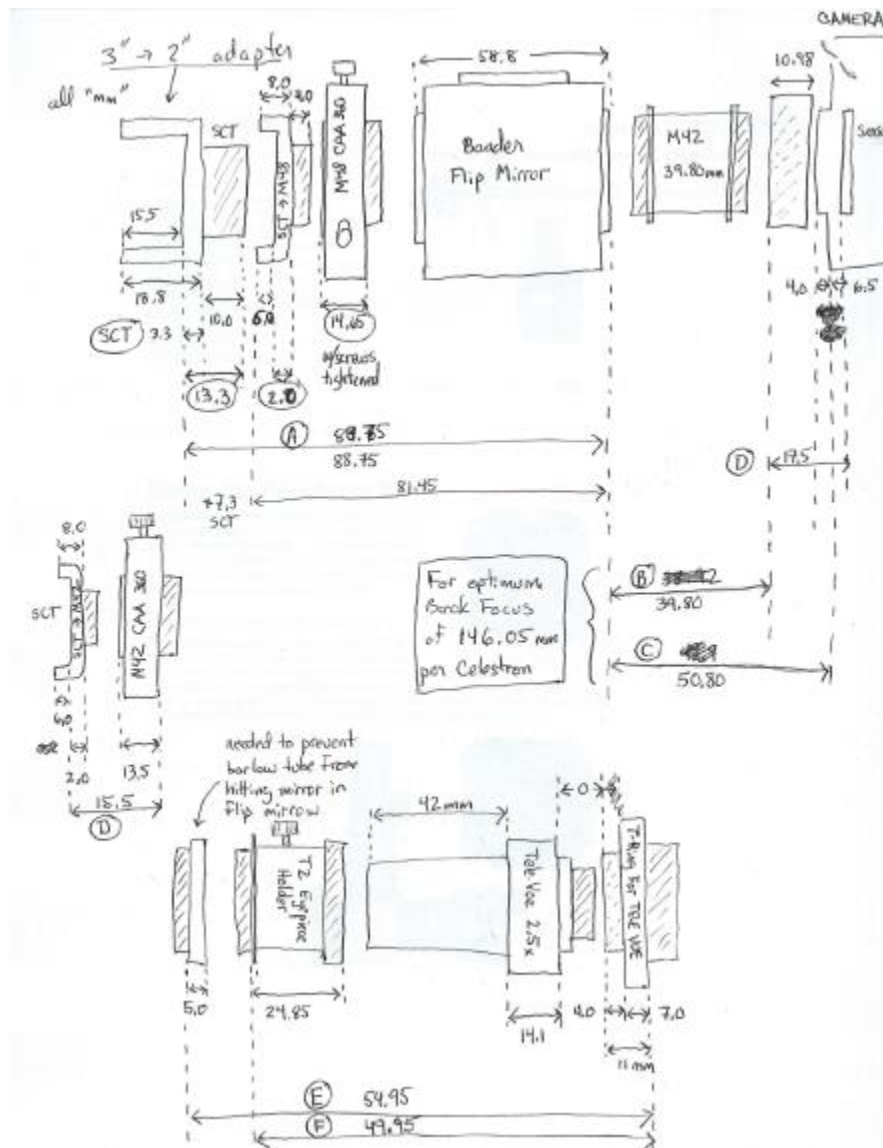


As can be seen in (B) the available space is 39.8mm. Unfortunately, as can be seen in (E), the space needed to insert the Tele Vue Power Mate lens is 54.95mm – so it is NOT possible to use the two in the same setup. See following page for the actual ‘balanced’ setup to use.

## Celestron C11 Edge HD Notes

Due to the limitation (see previous page) of not being able to get 'both' the flip mirror 'and' the Barlow in the optical train, the optical train is better off being re-configured a little bit to balance the camera and eyepiece focal points.

You can see how to do this by moving 10mm of spacer from the back to the front of the flip mirror, and adding 5mm underneath the eye piece click lock holder – see below:

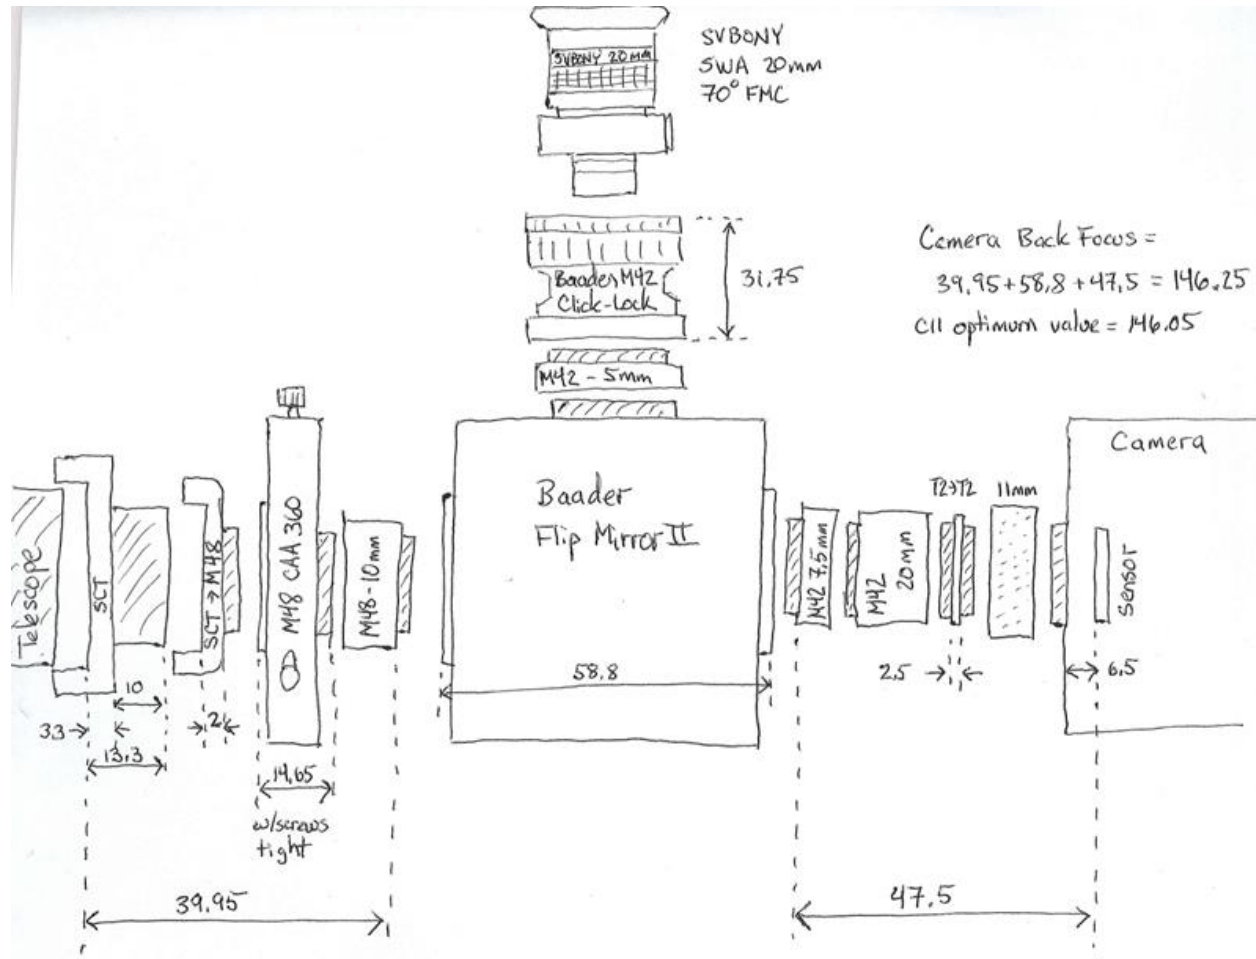


Using this setup you only have to focus the telescope once and 'both' the eyepiece and camera will be in (or very close to) focus.

The focus setting for this is 97,000 on the EAF.

### Visual Train Mechanical Setup for Tele Vue Power Mate 2.5x

The following diagram illustrates the mechanical spacing required to use the Tele Vue Power Mate 2.x Barlow with the C11 telescope

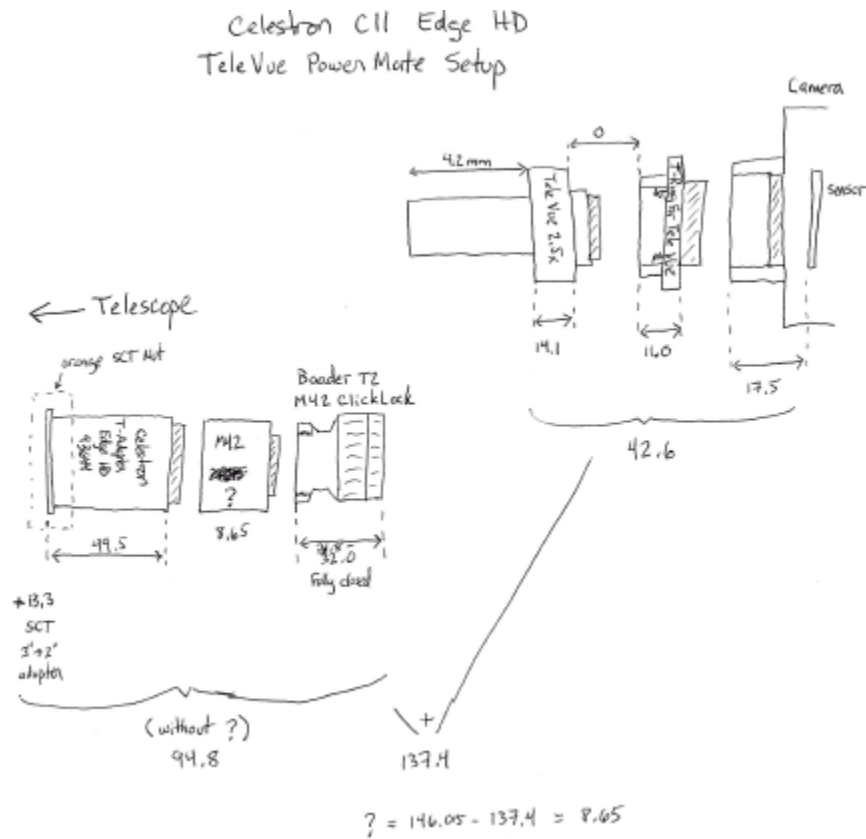

Note that most M42 adapters have a limited depth female thread, which is typically about 1mm shorter than the male threads on the Celestron T-Adapter, so you need to add this in too.

I only had a 10mm M2 adapter (not 8.65mm), so (with the extra 1mm above) I am about 2.35mm too long. From reading forum posts you should be OK as long as you are about 1-2mm from perfect, so this is probably OK.



## Barlows

### Suggested Barlow Workflow

Because the Barlow (especially when combined with a small sensor camera) reduces the number of stars visible to the camera, it will often make it extremely difficult (if not impossible) to focus, polar align and move to your target using the ASIAir app.

By following the steps below, you should be able to do all this, and then switch to the Barlow and start taking pictures.

1. Setup equipment using the [Flip Mirror Optical Train](#) so that you can easily focus and polar align without the Barlow.
  - a. Important
    - i. Remember to do a visual focus with the eye piece first to get the stars looking 'pretty good' – auto focus only works if the focus is already 'close'.
      1. When focusing the camera:
        - a. Use the ASIAir 'focus' feature (rather than 'preview') - it is much easier as you get a continuous set of images without having to constantly refresh the screen.
        - b. Remember to focus on the polar star to avoid blur in auto focus due to star movement as tracking is not yet enabled. If you forget, this is incredibly annoying because your auto focus keeps mysteriously failing no matter what you do.
      - ii. Remember to wait until it is really dark (1+ hour after sunset) or auto focus will fail.
2. Using Goto, move the mount to your target. Wait until the Goto function is completed and has verified that the target is centered.
3. Using the ASIAir app, disable the camera.
4. Unplug the cables from the camera.
5. Remove the camera from the [Flip Mirror Optical Train](#).
6. Remove the [Flip Mirror Optical Train](#) from the telescope.
7. Install the [Barlow Optical Train](#) on the telescope.
8. Attach the camera to the [Barlow Optical Train](#).
9. Re-connect the cables to the camera.
10. Using the ASIAir app, enable the camera.
  - a. You will likely also have to enable the ZWO EAF.
11. Re-adjust the focus (see notes in step 1.)

You should now have the Barlow setup pointing to your target and reasonably close to in focus.

### Barlow Notes

Clean the Barlow! Every tiny speck of dust is magnified to look like a drop of water on the image due to the magnification.


## Barlow Example of Jupiter

The following images were all taken on 11/27/2024 (5 days before perigee) – you can click on the images to download the full high-res version so you can see more detail.

These are the native (out of the camera, no zoom) images: left no Barlow, right Tele Vue 2.5 Power Mate.



These are both of the images zoomed in to fill the computer screen so that they both appear the same size: left no Barlow 520x zoom, right Tele Vue 2.5 Power Mate 240x zoom.

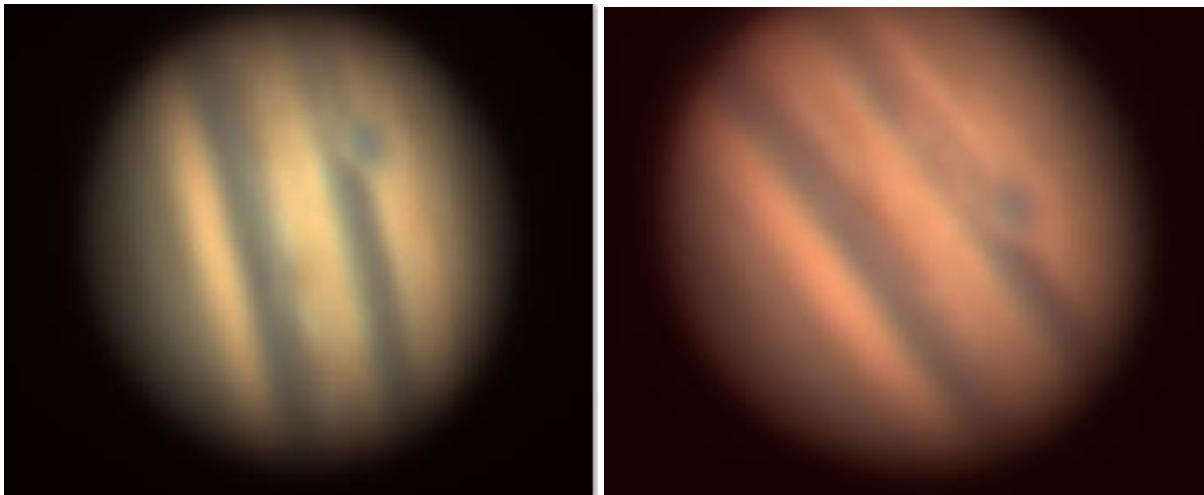

If you click on the no-Barlow left image above, you can see that it is highly pixelated, whereas the Barlow image on the right is smooth. However it is a little disappointing that the right Barlow image only shows a little more detail and is still 'fuzzy'. These images were produced with only 10-20 quality frames, doubtless if I spent the time capture more frames I would be able to get better images. On astronomy threads I see people capturing thousands of image to get one good image.